

AERODROME
CHART - ICAO
40°03'47.87"N
053°00'26.42"E

ELEV



285'

TOWER 124.000

GROUND 121.700

TURKMENBASHI, TURKMENISTAN

TURKMENBASHI

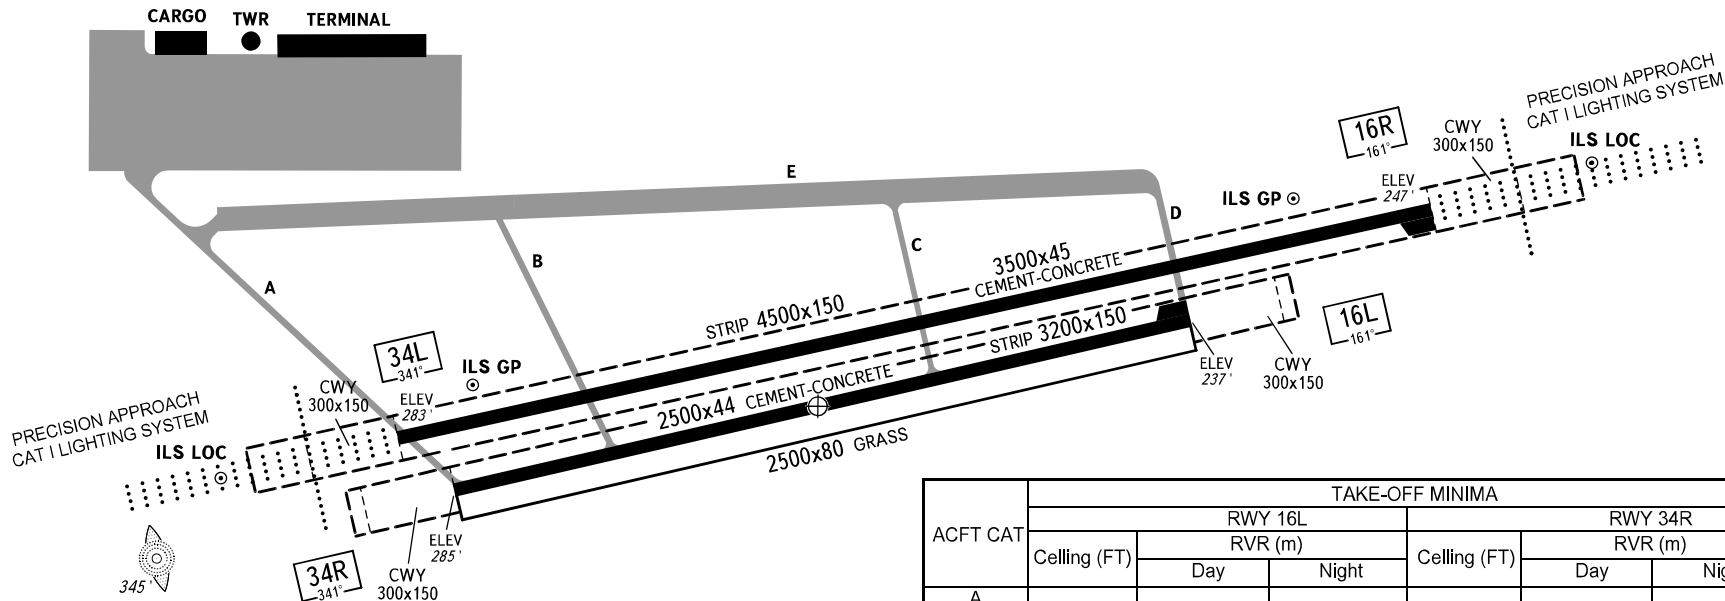

❗ * AVBL when friction coefficient is not less than 0.5 and crosswind component does not exceed half of maximum allowed value for take-off for this ACFT type.

WARNING

TWY E, B, C, D closed.



RWY	DIRECTION (TRUE)	THR	BEARING STRENGTH
16L	166°46'	40°04'27.42"N 053°00'14.01"E	PCN 26 /R/A/X/T
34R	346°46'	40°03'09.59"N 053°00'38.40"E	
16R	166°45'	40°04'53.43"N 052°59'57.59"E	PCN 70 /R/A/X/T
34L	346°46'	40°03'03.45"N 053°00'32.08"E	

ELEVATIONS IN **FEET**
DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC

ACFT CAT	TAKE-OFF MINIMA					
	RWY 16L			RWY 34R		
	Celling (FT)	RVR (m)		Celling (FT)	RVR (m)	
		Day	Night		Day	Night
A	No limits	300	U/S	No limits	300	U/S
B			U/S			U/S
C			U/S			U/S
D			U/S			U/S
HEL	430' (200')	600	U/S	480' (200')	600	U/S

ACFT CAT	TAKE-OFF MINIMA									
	RWY 16R						RWY 34L			
	Ceiling (FT)	RVR (m)				Ceiling (FT)	RVR (m)			
		With RCLL		Without RCLL			With RCLL		Without RCLL	
		Day	Night	Day	Night		Day	Night	Day	Night
A	No limits	200 * ❶		300	No limits	200 *		300	300	
B										
C										
D										
HEL	450' (200')	600		600	600	480' (200')	600			600

SCALE 1 : 25 000
m250 0 250 500 750m

TURKMENBASHI, TURKMENISTAN
TURKMENBASHI

