


INSTRUMENT
APPROACH
CHART - ICAO

RADAR120.000

TOWER124.000

ATIS133.200

TURKMENBASHI, TURKMENISTAN
TURKMENBASHI
ILS CAT I, LOC RWY 34L

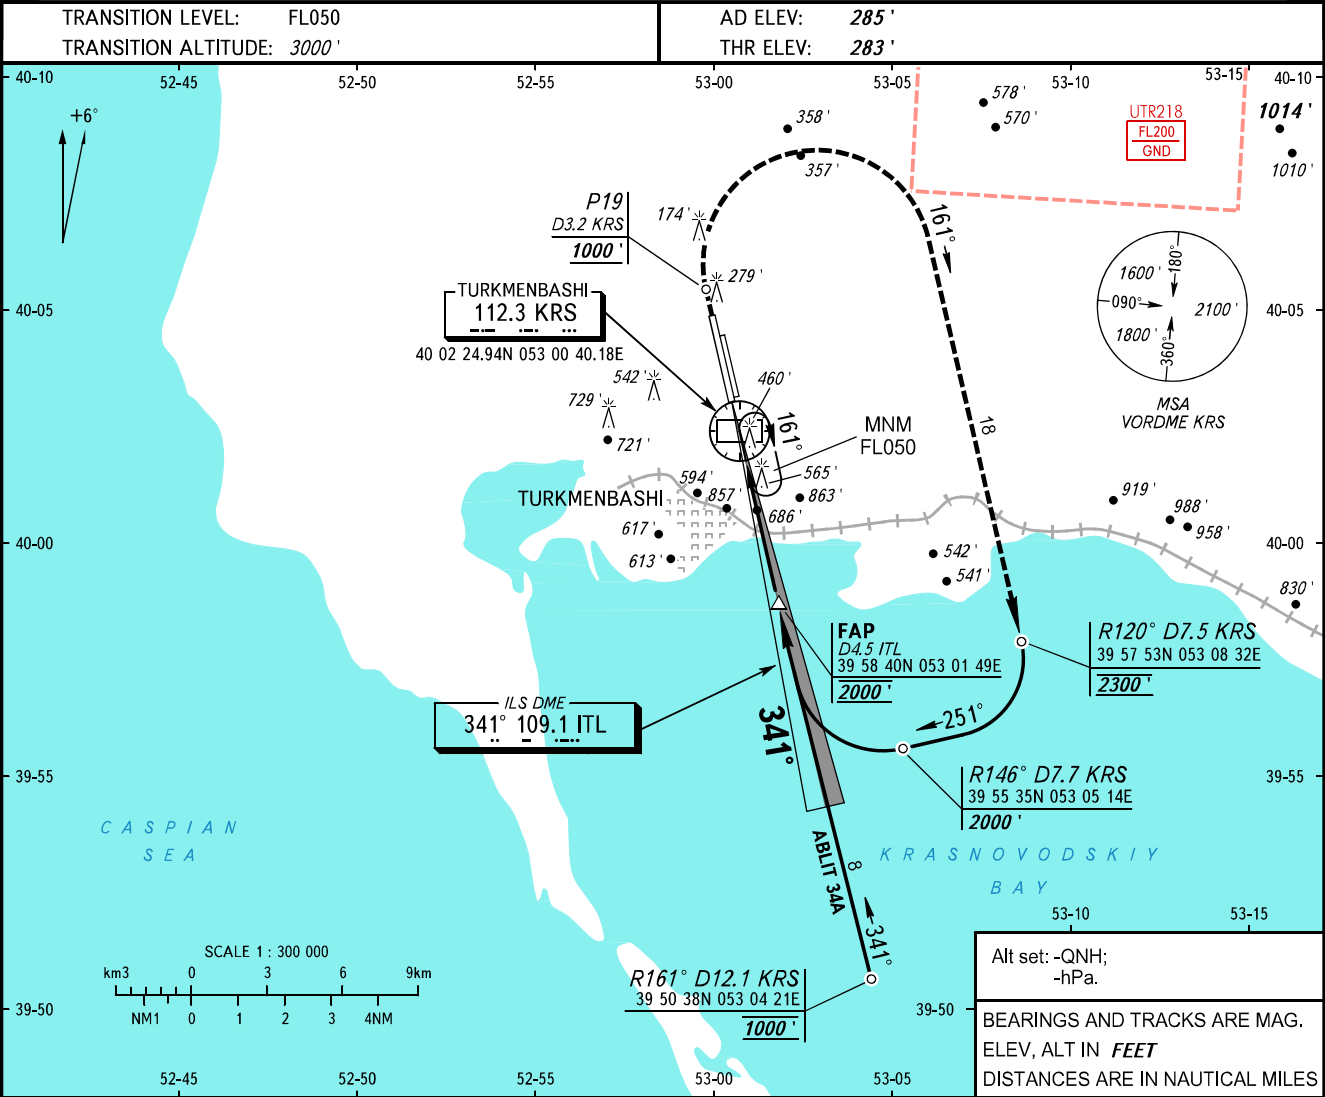

Alt set: -QNH;
-hPa.

BEARINGS AND TRACKS ARE MAG.
ELEV, ALT IN FEET
DISTANCES ARE IN NAUTICAL MILES

MISSED APPROACH

Climb on track 341° to P19 1000' or above,
then turn RIGHT onto track 161° climbing
to 2300' next according to the chart.
MAX 200KT.

MAPt
VORDME KRS

GP 3°30'

341°

FAP
D4.5 ITL
2000'

RDH 56'

State		CAT I		LOC		MISSED APPROACH IN CASE OF RADIO COMMUNICATION FAILURE:		
Straight-in Approach	A	DA(H) (FT) x RVR (M) 933' (650') x 1500 VIS 2300		MDA/H (FT) x RVR (M) 1030' (740') x 2700		Set SSR transponder to code 7600.		
	B					See MISSED APPROACH above.		
	C	CAT I ALS out RVR 3000 for all types ACFT		LOC ALS out RVR 3400 for all types ACFT				
	D							
GROUND SPEED		KT	70	90	100	120	140	160
RATE OF DESCENT		ft/min	372	478	531	637	743	849

AIRAC AMDT 04/26

«TURKMENHOWAYOLLARY» STATE SERVICE

CHANGE: New chart